



# DC150 DC250 DC350 Blanket Warming Cabinet

37-82°C (98-180°F)  
temperature range

WarmRight® technology  
uses multiple zone heating  
that monitors surfaces for  
safe temperature ranges.

Efficient, balanced control  
allows for low energy  
consumption and  
minimal heat loss.

Interior lighting casts  
a comforting blue glow  
with two (2) different  
intensity settings.

Epoxy-coated  
interior surfaces

Available in three (3)  
different cabinet sizes



DC250



DC350

 **ENTHERMICS**  
Medical Systems

[www.enthermics.com](http://www.enthermics.com)

*Experience the Entermics difference:  
Quality beyond comfort.*

# DC150, DC250, DC350 Blanket Warming Cabinet

## Specifications:


- Single-chamber warming cabinet
- White epoxy-coated steel exterior casing and interior insert
- Single pane, energy efficient, e-coated glass window in door allows for inventory observation
- Easy, hands-free, push-button door release
- Door is fully gasketed and hinged on the right side of the unit
- WarmRight® technology utilizes multiple zone heating that monitors surfaces for safe temperature ranges
- DC350 includes a heated center shelf
- Furnished with four (4) 3/4" (19mm) non-skid rubber feet
- Optional casters available

## Control:

- Electronic control
- Efficient, balanced heating system allows for low energy consumption and minimal heat loss
- Adjustable temperature range of 37 - 82°C (98 - 180°F)
- Operates in Celsius or Fahrenheit
- Four digit L.E.D. display
- On/Off key
- Up and down arrow keys
- Actual temperature key
- Interior light key
- Built-in speaker for audible feedback
- Built-in button lock-out feature on control

## Additional features:

- L.E.D. interior lighting casts a comforting blue glow with two (2) different intensity settings, and off mode.
- In the event of a power failure the cabinet will remember its programming and begin to operate as before when power is restored.
- A warming shut-off system, separate from the electronic control, prevents overheating.
- Optional timer allows the user to program the control to automatically turn on and off at a selected time.

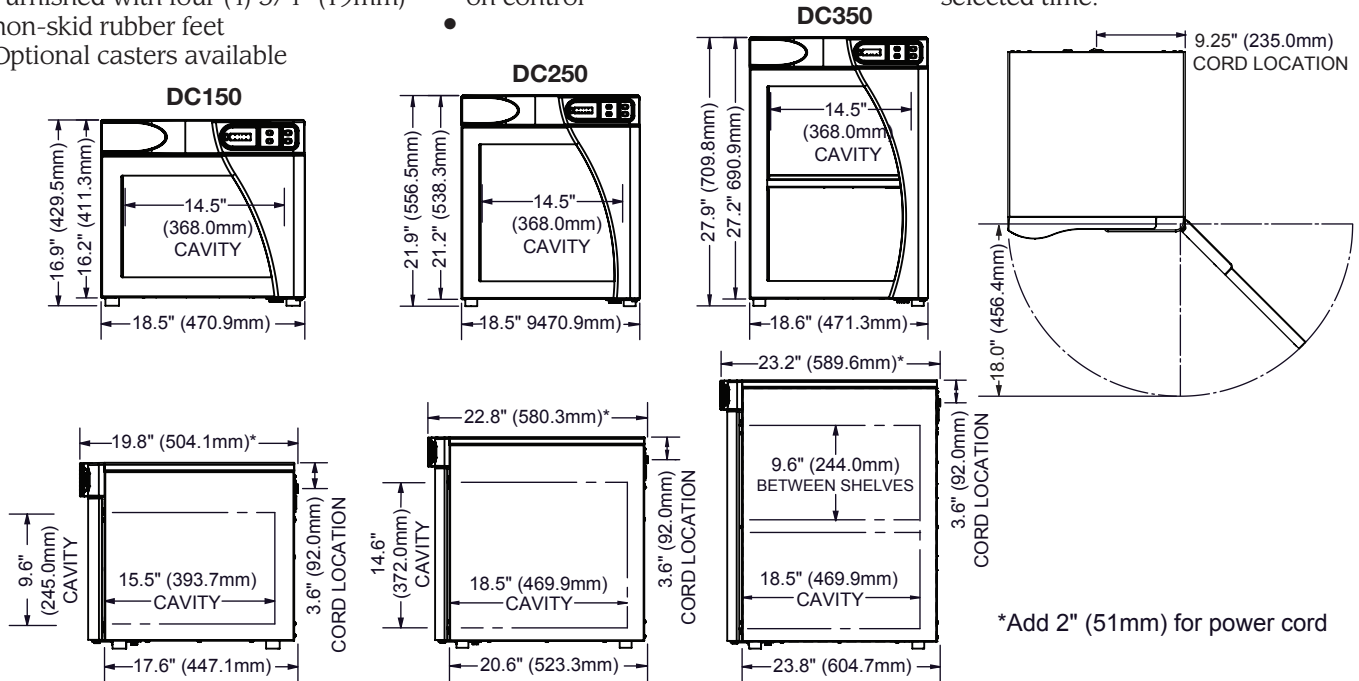

Model	DC150	DC250	DC350
Interior Capacity	1.5 ft <sup>3</sup>	2.5 ft <sup>3</sup>	3.5 ft <sup>3</sup>
Net Weight	56 lbs (25 kg)	67 lbs (30 kg)	78 lbs (35 kg) EST.
Ship Weight	58 lbs (26 kg)	CONTACT FACTORY	CONTACT FACTORY
<b>Electrical</b>			
120 V.A.C. 50/60 Hz, 1ph	5.0 Amps, 0.6 kW NEMA 5-15P 15A - 125V Plug Hospital Grade	5.0 Amps, 0.6 kW NEMA 5-15P 15A - 125V Plug Hospital Grade	6.7 Amps, 0.8 kW NEMA 5-15P 15A - 125V Plug Hospital Grade
230 V.A.C. 50/60 Hz, 1ph	2.6 Amps, 0.6 kW BS 1363 Plug (UK only) CEE 7/7, 220-230V Plug	2.6 Amps, 0.6 kW BS 1363 Plug (UK only) CEE 7/7, 220-230V Plug	3.4 Amps, 0.8 kW BS 1363 Plug (UK only) CEE 7/7, 220-230V Plug

Options & Accessories	
Casters, 3" (25mm)	5012693
Timer	TIMER



[www.enthermics.com](http://www.enthermics.com)  
An ISO 13485:2003 certified company

W164 N9221 Water Street • PO Box 443  
Menomonee Falls, WI 53052-0443  
Phone 262.251.8356 • 800.862.9276  
Fax 262.251.7067  
Email [generalinfo@enthermics.com](mailto:generalinfo@enthermics.com)